


# Circular Reinforced Concrete Pipe

## Flared End Sections

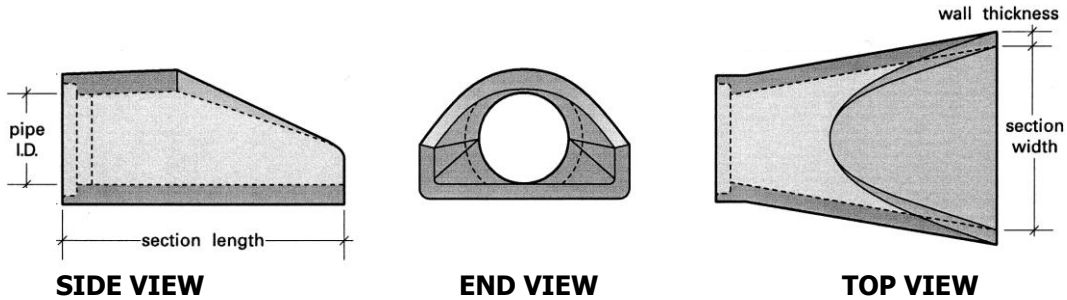

Pipe I.D. (inches)	Wall Thickness (inches)	Section Length (feet)	Section Width (inches)	A dimension * (inches)	C dimension * (inches)
12	3	6	24	4	53
15	3	6	30	6	46
18	2.5	6.5	36	10	52
24	3	6.5	48	10	38
30	3.5	6.5	60	12	26
36	4	8	72	15	37
42	4.5	8	78	21	30
48	5	8	84	24	22
54	6.25	8	90	27	31
60	6.75	8	96	30	40
66	6.5	8	102	30	19
72	7.75	8	108	34	21

- Additional information available upon request, product data subject to change without notice
- Flared End Sections to be produced with concrete meeting CDOT Class 0 sulfate resistance. The engineer shall confirm that this level of sulfate resistance is adequate to meet project requirements and notify Foley Products Company if a higher level of sulfate resistance is needed.

\* A dimension and C dimension are as defined by CDOT M603-10. Dimensions shown here may vary from CDOT M603-10.



**Denver Pipe Plant**  
 8311 West Carder Court  
 Littleton, Colorado 80125  
 303.791.1600