


ID	WALL	WT	BL	JT	BD	TONS
15"	B	2.25"	6.50"	4.25"	23.125"	0.61
18"	B	2.50"	6.50"	4.25"	26.625"	0.74
24"	B	3.00"	7.00"	4.75"	32.625"	1.10
30"	B	3.50"	7.00"	5.00"	39.500"	1.58
36"	B	4.00"	7.00"	5.00"	45.625"	2.07
42"	B	4.50"	7.00"	5.00"	52.000"	2.66
48"	B	5.00"	N/A	4.25"	N/A	3.47
54"	B	5.50"	N/A	4.25"	N/A	4.28
60"	B	6.00"	N/A	4.75"	N/A	5.18
72"	B	7.00"	N/A	5.00"	N/A	7.24

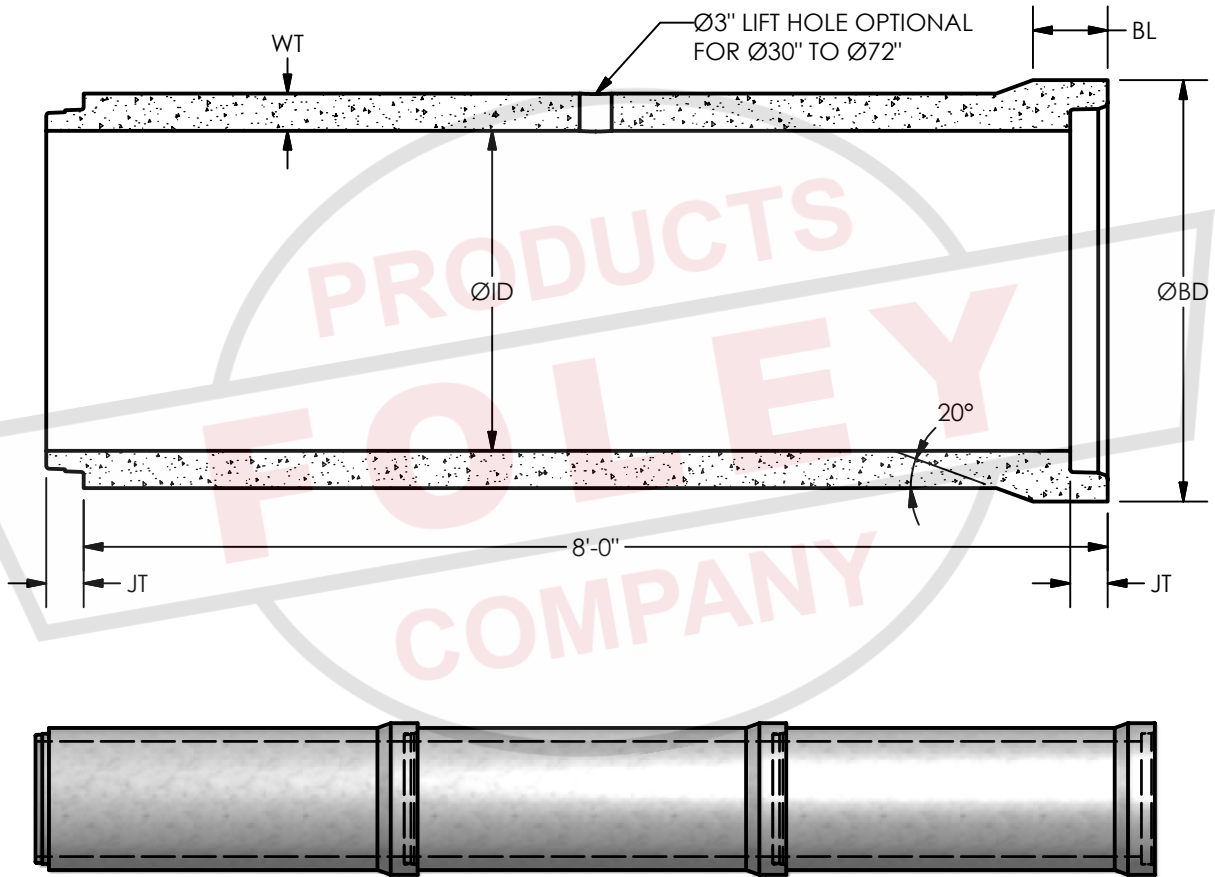

MATERIALS:

CONCRETE: 4,000 PSI, TYPE I/II CEMENT
 CONFORMS TO ASTM C-76
 JOINT CONFORMS TO ASTM C-443 / C-1628

NOTES:

AVAILABLE IN CLASS III, IV AND V
 SEE 3.2 FOR JOINT DETAIL

PARTS SHOWN:

Ø30" B-WALL WITH LIFT HOLE



REINFORCED CONCRETE PIPE

Ø15" - Ø72" B-WALL PIPE

3.1