


OPENING (AS
REQUIRED)
IN TOP SLAB

FLAT TOP
(WEIGHT: 1.875 lbs.)

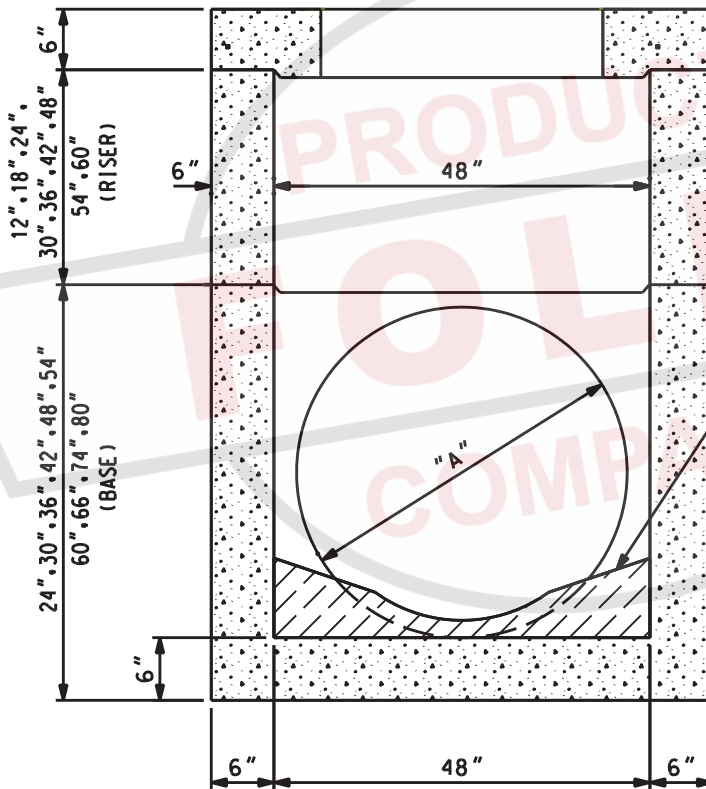

WEIGHTS - MAX.

12" RISER:	1.350 lbs.
18" RISER:	2.025 lbs.
24" RISER:	2.700 lbs.
30" RISER:	3.375 lbs.
36" RISER:	4.050 lbs.
42" RISER:	4.725 lbs.
48" RISER:	5.400 lbs.
54" RISER:	6.075 lbs.
60" RISER:	6.750 lbs.

24" BASE:	3.900 lbs.
30" BASE:	4.575 lbs.
36" BASE:	5.250 lbs.
42" BASE:	5.925 lbs.
48" BASE:	6.600 lbs.
54" BASE:	7.275 lbs.
60" BASE:	7.950 lbs.
66" BASE:	8.625 lbs.

PREFORMED
INVERT (AS
NEEDED)

GENERAL NOTES:

1. ALL MATERIAL, DESIGN, MANUFACTURE, PHYSICAL TEST REQUIREMENTS, FINISH MARKING, INSPECTION, REJECTION AND REPAIRS TO MEET "STANDARD SPECIFICATIONS FOR PRECAST CONCRETE WATER AND WASTEWATER STRUCTURES", PER ASTM C-913 (LATEST REVISION).

DIMENSION "A"
AS REQUIRED



HERMITAGE, TN LENOIR CITY, TN
FRANKLIN, TN CHATANOOGA, TN